

SMC1550

High Performance infrared SMD LED on ceramics


SMC1550 consists of an InGaAsP LED mounted on the ceramics package and is sealed with silicone.

It emits a spectral band of radiation at 1550nm.

Outer dimension(Unit:mm)

Specifications

- 1) Product Name SMD type infrared LED
- 2) Type No. SMC1550
- 3) Chip
 - (1) Chip Material InGaAsP
 - (2) Peak Wavelength 1550nm typ.
- 4) Package
 - (1) Package Ceramics
 - (2) Lens Silicone resin

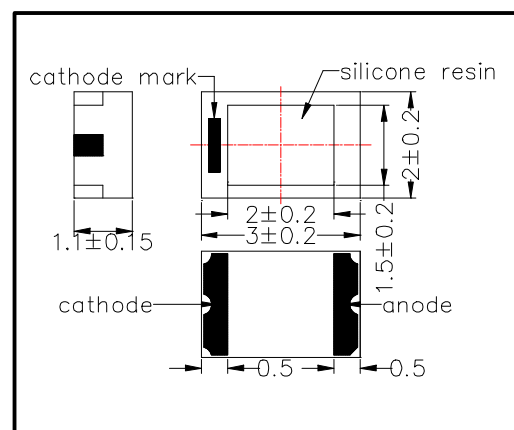

Absolute Maximum Rating

Item	Symbol	Maximum Rated Value	Unit	Ambient Temperature
Power Dissipation	P _D	120	mW	T _a =25°C
Forward Current	I _F	100	mA	T _a =25°C
Pulse Forward Current	I _{FP}	1	A	T _a =25°C
Reverse Voltage	V _R	5	V	T _a =25°C
Operating Temperature	T _{OPR}	-20 ~ +85	°C	
Storage Temperature	T _{STG}	-30 ~ +100	°C	
Soldering Temperature	T _{SOL}	240	°C	

‡Pulse Forward Current condition: Duty=1% and Pulse Width=1us.

‡Soldering condition: Soldering condition must be completed within 3 seconds at 230°C

Electro-Optical Characteristics

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	V _F	I _F =50mA		1.2	1.5	V
Reverse Current	I _R	V _R =5V			10	uA
Total Radiated Power	P _O	I _F =50mA		1.0		mW
Peak Wavelength	λ _P	I _F =50mA	1500	1550	1600	nm
Half Width	Δλ	I _F =50mA		100		nm
Viewing Half Angle	Q _{1/2}	I _F =50mA		±55		deg.
Rise Time	t _r	I _F =50mA		10		ns
Fall Time	t _f	I _F =50mA		10		ns

‡Total Radiated Power is measured by Ando AQ2140/2742

EPITEX INC. : 4, Nishiaketa-Cho, Higashi-Kujiyou, Minami-Ku, Kyoto, Japan

Tel.: ++81-75-682-2338 Fax: ++81-75-682-2267

e-mail: sales-dep@epitex.com

<http://www.epitex.com>