

SMT630

High Performance Red color TOP LED


SMT630 consists of an AlGaInP LED mounted on the lead frame as TOP LED package and is 200mcd typical of Brightness.

It emits a spectral band of radiation at 630nm.

Specifications

- | | |
|---------------------|---------------|
| 1) Product Name | TOP LED |
| 2) Type No. | SMT630 |
| 3) Chip | |
| (1) Chip Material | AlGaInP |
| (2) Peak Wavelength | 630nm typ. |
| 4) Package | |
| (1) Lead Frame Die | Silver Plated |
| (2) Package Resin | PPA Resin |
| (3) Lens | Epoxy Resin |

Outer dimension (Unit: mm)

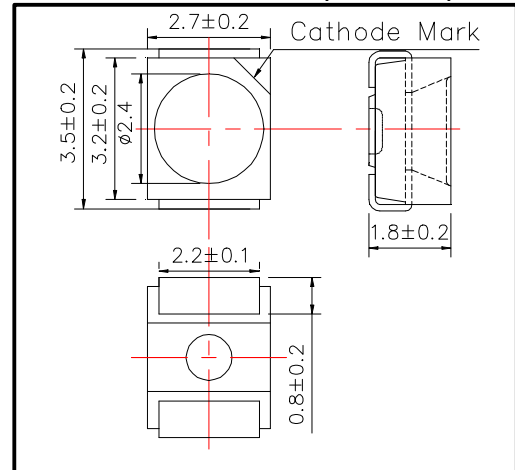

Absolute Maximum Ratings

Item	Symbol	Maximum Rated Value	Unit	Ambient Temperature
Power Dissipation	P _D	120	mW	T _a =25°C
Forward Current	I _F	50	mA	T _a =25°C
Reverse Voltage	V _R	5	V	T _a =25°C
Operating Temperature	T _{OPR}	-20 ~ +80	°C	
Storage Temperature	T _{STG}	-30 ~ +80	°C	
Soldering Temperature	T _{SOL}	240	°C	

‡Soldering condition: Soldering condition must be completed within 3 seconds at 240°C

Electro-Optical Characteristics [T_a=25°C]

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	V _F	I _F =20mA		2.00	2.30	V
Reverse Current	I _R	V _R =5V			10	uA
Total Radiated Power	P _O	I _F =20mA		2.0		mW
Brightness	I _v	I _F =20mA	100	200		mcd
Peak Wavelength	λ _P	I _F =20mA	620	630	640	nm
Half Width	Δλ	I _F =20mA		20		nm
Viewing Half Angle	2θ _{1/2}	I _F =20mA		±55		deg.

‡Total Radiated Power is measured by Photodyne #500

‡Brightness is measured by Tektronix J-16.

EPITEX INC. : 4, Nishiaketa-Cho, Higashi-Kujyou, Minami-Ku, Kyoto, Japan

Tel.: ++81-75-682-2338 Fax: ++81-75-682-2267

e-mail: sales-dep@epitex.com

<http://www.epitex.com>