


PD015F32 hermetical sealing type photo-diode

PD015F32 is a PIN-photodiode featuring excellent responsivity and high photocurrent. This PIN-photodiode consists of a large chip with 1.3x1.3mm active area mounted on the TO-46 stem and is hermetical sealed by metal can with ball lens.

These devices are designed to be easy of setting up optically with an angle of half sensitivity of $\pm 15^\circ$

Specifications

- 1) Product Name Metal Stem Type Photo-Diode
- 2) Type No. PD015F32
- 3) Chip
 - (1) Chip Size 1.5mmx1.5mm
 - (2) Active Area 1.3mmx1.3mm
- 4) Package
 - (1) Type TO-46
 - (2) Lens Glass Ball Lens
 - (3) Cap Gold Plated

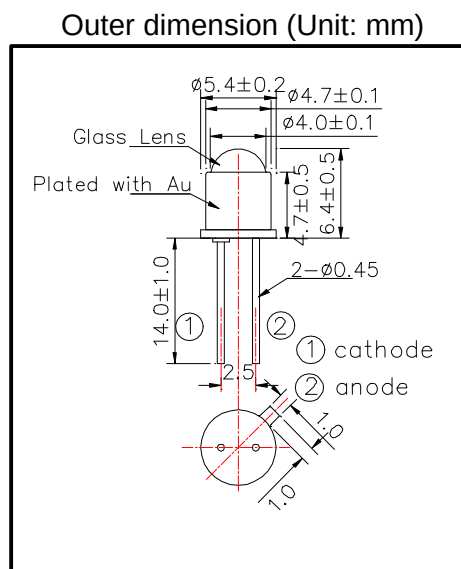

Absolute Maximum Ratings [Ta=25°C]

Item	Symbol	Maximum Rated Value	Unit
Reverse Breakdown Voltage	$V_{(BR)R}$	170	V
Operating Temperature	T_{OPR}	-25 ~ +100	°C
Storage Temperature	T_{STG}	-30 ~ +125	°C
Soldering Temperature	T_{SOL}	240	°C

‡Soldering condition: Soldering condition must be completed within 2 seconds at 240°C

Electro-Optical Characteristics [Ta=25°C]

Item	Symbol	Condition	Minimum	Typical	Maximum	unit
Reverse Photo Current	I_L	$V_R=10V, L=1000Lx$		40		uA
Reverse Dark Current	I_D	$V_R=10V$			10	nA
Open Circuit Voltage	V_{OC}	$V_R=10V, L=1000Lx$		410		mV
Spectral Responsivity (Peak)	I_P			900		nm
Half Angle of Sensitivity	$Q_{1/2}$			± 15		deg.
Total Capacitance	C_T	$V_R=10V, f=1MHz$		6		pF
Rise/Fall Time(10% ~ 90%)	t_r	$R_L=1KW, V_R=10V$		10		ns
	t_f			10		ns