


PD032P00 stem type photo-diode

PD032P00 is a PIN-photodiode featuring excellent responsibility and high photocurrent. This PIN-photodiode consists of a large chip with 2.8mmx2.8mm active area mounted on the TO-39 stem and is sealed with epoxy resin. These devices are designed to be easy of setting up optically with a wide angle of half sensitivity.

Specifications

1)Product Name	Stem Type Photo-Diode
2) Type No.	PD032P00
3) Chip	
(1) Chip Size	3.2mmx3.2mm
(2) Active Area	2.8mmx2.8mm
4) Package	
(1) Type	TO-39
(2) Lens	Epoxy Resin

Outer dimension (Unit: mm)

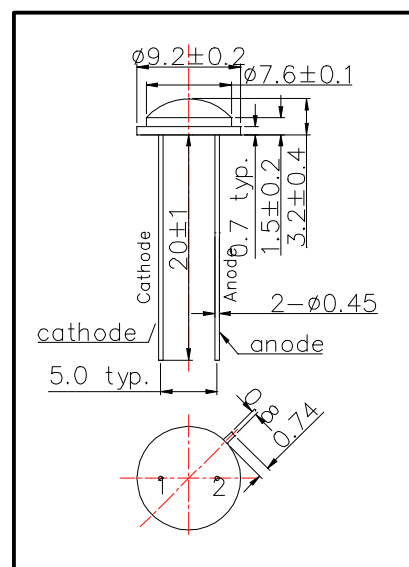

Absolute Maximum Ratings [Ta=25°C]

Item	Symbol	Maximum Rated Value	Unit
Reverse Breakdown Voltage	$V_{(BR)R}$	170	V
Operating Temperature	T_{OPR}	-25 ~ +100	°C
Storage Temperature	T_{STG}	-30 ~ +125	°C
Soldering Temperature	T_{SOL}	240	°C

‡Soldering condition: Soldering condition must be completed within 2 seconds at 240°C

Electro-Optical Characteristics [Ta=25°C]

Item	Symbol	Condition	Minimum	Typical	Maximum	unit
Reverse Photo Current	I_L	$V_R=10V, L=1000Lx$		100		uA
Reverse Dark Current	I_D	$V_R=10V$		5	30	nA
Open Circuit Voltage	V_{OC}	$V_R=10V, L=1000Lx$		350		mV
Spectral Responsivity (Peak)	I_P			900		nm
Half Angle of Sensitivity	$\theta_{1/2}$			±65		deg.
Total Capacitance	C_T	$V_R=10V, f=1MHz$		25		pF
Rise/Fall Time(10%~90%)	t_r	$R_L=1KW, V_R=10V$		50		ns
	t_f			50		ns